

Impinger II 1100 series is a self-contained conveyorised gas or electric Impinger oven that is stackable up to three high and designed for small to medium outputs requiring high output with minimal labour.

Comes with an exclusive lift off door for removing the conveyor and air distribution fingers from the front of the unit for easy cleaning in tight spaces.

The digital control panel makes it simple to adjust speed and temperature.

Standard with FastBake™ technology which can reduce bake time by as much as 30% without increased noise levels or loss of product quality.

STANDARD FEATURES

- FastBake™ technology
- Stackable up to three oven cavities high
- 18" (457mm) wide, 56" (1422mm) long conveyor belt with product stop
- 28" (711mm) baking chamber
- Temperature adjustable from 121°C to 302°C
- Conveyor speed is adjustable from one minute to thirty minutes cooking time
- Front-loading access door with cool handle
- Direct conveyor drive is powered by an AC motor
- Stainless Steel top, front and sides
- Oven start-up/check-out by service agent included in price
- Includes stand with castors
- Oven is reversible via a switch at the rear of the oven
- Exclusive lift off door improved cleaning in tight spaces

OPTIONAL FEATURES

- Split belt
- Flexible gas hose with quick disconnect

DIMENSIONS 1422W x 991D x 1067H mm (single deck) 1422W x 991D x 1511H mm (double deck) 1422W x 991D x 1575H mm (triple deck) Clearance: Rear:152mm Right side:610mm

PRODUCTION EXAMPLE PER DECK

Single deck: 27 x 12" pizzas/hr at 6mins

TECHNICAL DATA

| № 1154№ 1155 | • | Output 42.2mj per deck 42.2mj per deck 10kW per deck |
|---|--------------------------|---|
| 1104 | 413 V 31 Hase 30HZ 13aHp | TORVV per deck |

Matural Gas LP Gas Zelectric








SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


1100 SERIES IMPINGER II

SINGLE BELT CONVEYORISED OVEN



| ORDERING GUIDE | | | |
|------------------|-----|-------------------------|--|
| Model Numbers | Qty | Description | |
| 1100 Single Deck | | | |
| 1154-S00-B-KF006 | | Natural Gas | |
| 1155-S00-B-KF006 | 1 | LP Gas | |
| 1164-S00-E-KF006 | | Electric | |
| 1120-1 | 1 | High Stand With Castors | |
| 1140 | 1 | Take Off Shelf | |
| 1100 Double Deck | | | |
| 1154-S00-B-KF006 | | Natural Gas | |
| 1155-S00-B-KF006 | 2 | LP Gas | |
| 1164-S00-E-KF006 | | Electric | |
| 1120-1 | 1 | High Stand With Castors | |
| 1140 | 2 | Take Off Shelf | |
| 1100 Triple Deck | | | |
| 1154-S00-B-KF006 | | Natural Gas | |
| 1155-S00-B-KF006 | 3 | LP Gas | |
| 1164-S00-E-KF006 | | Electric | |
| 1124-1 | 1 | Low Stand With Casters | |
| 1140 | 3 | Take Off Shelf | |

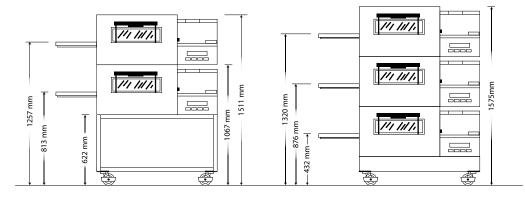





National Head Office 156 Swann Drive

Derrimut VIC 3030 +61 3 8369 4600 Tel: Fax: +61 3 8369 4699 Melbourne

96-100 Tope Street **South Melbourne VIC 3205** +61 3 8369 4600 Tel: Fax: +61 3 8699 1299

Sydney

20/4 Avenue of the Americas Newington, NSW 2127

Tel: +61 2 9748 3000 Fax: +61 2 9648 4762 Brisbane

1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311

Unit 16, 7 Abrams Street Balcatta, WA 6021 Tel: +61 8 6217 0700 Fax: +61 8 6217 0799