

Gas bratt pan constructed AISI 304 stainless steel. Tilting stainless steel pan, 60-litre capacity, rectangular with rounded corners for easy cleaning. 12mm thick compound bottom.

Heating by steel stable-flame burners with pilot flame and safety thermocouple mounted under the pan. Thermostatic valve providing temperature control range of 100°C to 330°C. Automatic piezoelectric ignition. Balanced cover with handle. Pan tilting by handwheel with foldaway handle. Height-adjustable stainless steel feet.

STANDARD FEATURES

- Heavy Duty 1.5mm thick pressed tops
- Modular design
- High efficiency burners
- IPX4 water rating
- Easy to clean
- Flame failure and pilot lights standard
- Interlocking device supplied standard on all units

OPTIONAL FEATURES

- Castors
- Flexible gas hose with quick disconnect and restraining kit
- Power Lead and 10A Plug

DIMENSIONS

External: 730D x 800W x 850-900H mm

TECHNICAL DATA

Gas Type: Natural or Propane

Total Output (gas): 51MJ

Gas Connection: 1/2"

Power Supply: 230 VAC-1 50/60 HZ


Power Consumption (electric): 0.2kW AGA approval number: 7412


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

ANBR78GI

70 SERIES 800MM WIDE 60-LITRE GAS BRATT PAN MANUAL TILT, STAINLESS STEEL BASE





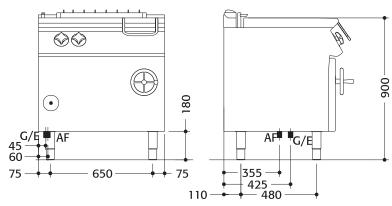



National Head Office 156 Swann Drive

Derrimut VIC 3030 +61 3 8369 4600 Tel: Fax: +61 3 8369 4699 Melbourne 96-100 Tope Street South Melbourne VIC 3205 +61 3 8369 4600 Tel: +61 3 8699 1299

Fax:

Sydney 20/4 Avenue of the Americas Newington, NSW 2127

Tel: +61 2 9748 3000 Fax: +61 2 9648 4762 Brisbane

1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311

Perth

Unit 16, 7 Abrams Street Balcatta, WA 6021 Tel: +61 8 6217 0700 Fax: +61 8 6217 0799